


NOTES:

1. CURBS AT LOCATIONS MARKED 'X' SHALL BE DROPPED.
2. ALL ACCESSES MUST BE SIGNED AT BOTH ENDS PROHIBITING MOTOR VEHICLES OTHER THAN EMERGENCY. (Rb-19t, Wa-8.)
3. DRAINAGE SHALL BE PROVIDED WITH A MIN. LONGITUDINAL GRADIENT OF 0.3%.
4. FLEXIBLE GUIDE POSTS W/ RUBBER BASE ANCHORED TO PAVEMENT.
5. ASPHALT PAVEMENT THICKNESS
 - PERMANENT 90mm
 - TEMPORARY 50mm

PLAN

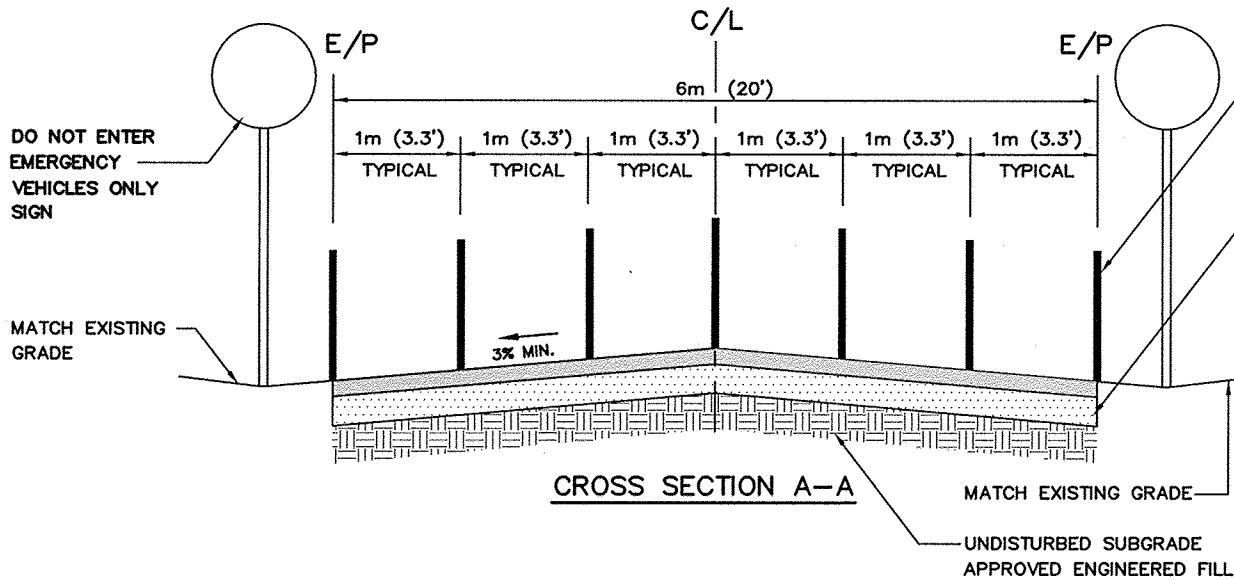

CROSS SECTION A-A

36" HIGH
FLEXIBLE GUIDE POSTS
@ 1m SPACING

ASPHALT HL 4 ON 300mm
GRANULAR 'A' COMPACTED
TO 100% SPD.

CITY OF WINDSOR

DEPARTMENT OF PUBLIC WORKS

EMERGENCY ACCESS AREA

DRAWN BY: T.FRICKY

DATE: JANUARY/07

REVISION:

CH'KD BY: T.RUFFOLO

CH'KD BY: P.W.

PASSED BY: T.M.

[Signature]
CITY ENGINEER

AS-229